

Visit www.businessphonespecialists.com
Or call us at 208-523-0006, 208-232-2224
Or 307-733-8700 for assistance.
Email us at sales@businessphonespecialists.com



CREATING AND THEN APPLYING A DISALLOWED LIST ON THE AVAYA PARTNER PHONE SYSTEM

1. Create your list using our suggested list you download from our website and other numbers you wish.
2. Watch our videos on our website and use the info below to create your list.
3. Once created, apply your disallowed list to all of your extensions from 10-57 as show below and in the BPS video.

NOTE: APPLY THE LIST YOU CREATED TO ALL EXTENSIONS EVEN IF YOU DON'T HAVE SETS ATTACHED TO THEM (Extensions 10 thru 57)

System Programming Quick Reference

Place the Programming Overlay on the dialpad of the system display phone at extension 10 or 11

TO START SYSTEM PROGRAMMING

PRESS **Feature** **1** **1**
PRESS **System Program**
PRESS **System Program**

TO END SYSTEM PROGRAMMING

PRESS **Feature** **1** **1**

TO USE A SPECIFIC PROCEDURE

DIAL **1** and three-digit procedure code
Example: **1** **1** **1** for System Date

TO CYCLE THROUGH SYSTEM PROGRAMMING PROCEDURES

PRESS **Next Procedure** or **Prev Procedure**
NOTE: Procedures #399, #609, and #728—shown below in dashed boxes—are skipped when cycling.

TO CYCLE THROUGH AVAILABLE SETTINGS

PRESS **Next Data** or **Prev Data**
TO RETURN TO FACTORY SETTING
PRESS **Remove**

Dialing Restrictions and Permissions

DISALLOWED PHONE NUMBER LISTS (p. 5-100)

DIAL **#404**
DIAL a list number (1-8)
DIAL a list entry (01-10)

To add entry:

DIAL the telephone number (up to 12 digits)

PRESS **Enter**

PRESS **Remove** to remove a list entry

PRESS **Next Item** to program another list entry

To program another list:

PRESS **Next Procedure** **Prev Procedure**, enter a new list number, and repeat above steps

DISALLOWED LIST ASSIGNMENTS (p. 5-99)

DIAL **#405**
DIAL a system extension number
DIAL a list number (1-8)
DIAL **1** = Assigned
DIAL **2** = Not Assigned ✓


PRESS **Next Item** to assign another list

To program another extension:

PRESS **Next Procedure** **Prev Procedure**, enter a new extension number, and repeat above steps

CREATE
→

Apply
→

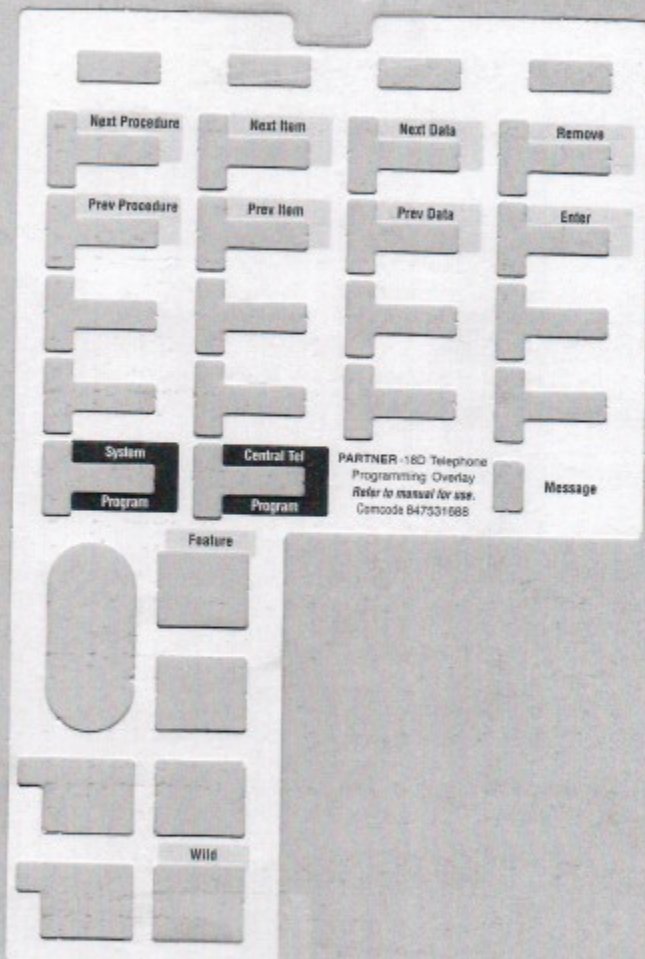

PARTNER-180 Telephone
Programming Overlay
Refer to manual for use.
Comcode 847931688